





LANDSCAPE LEGEND
GROUND COVER




25,000± S.F. INCLUDING 10% FOR WASTE
PREMIUM TURFGRASS
COMMERCIAL GRADE, LOCALLY GROWN

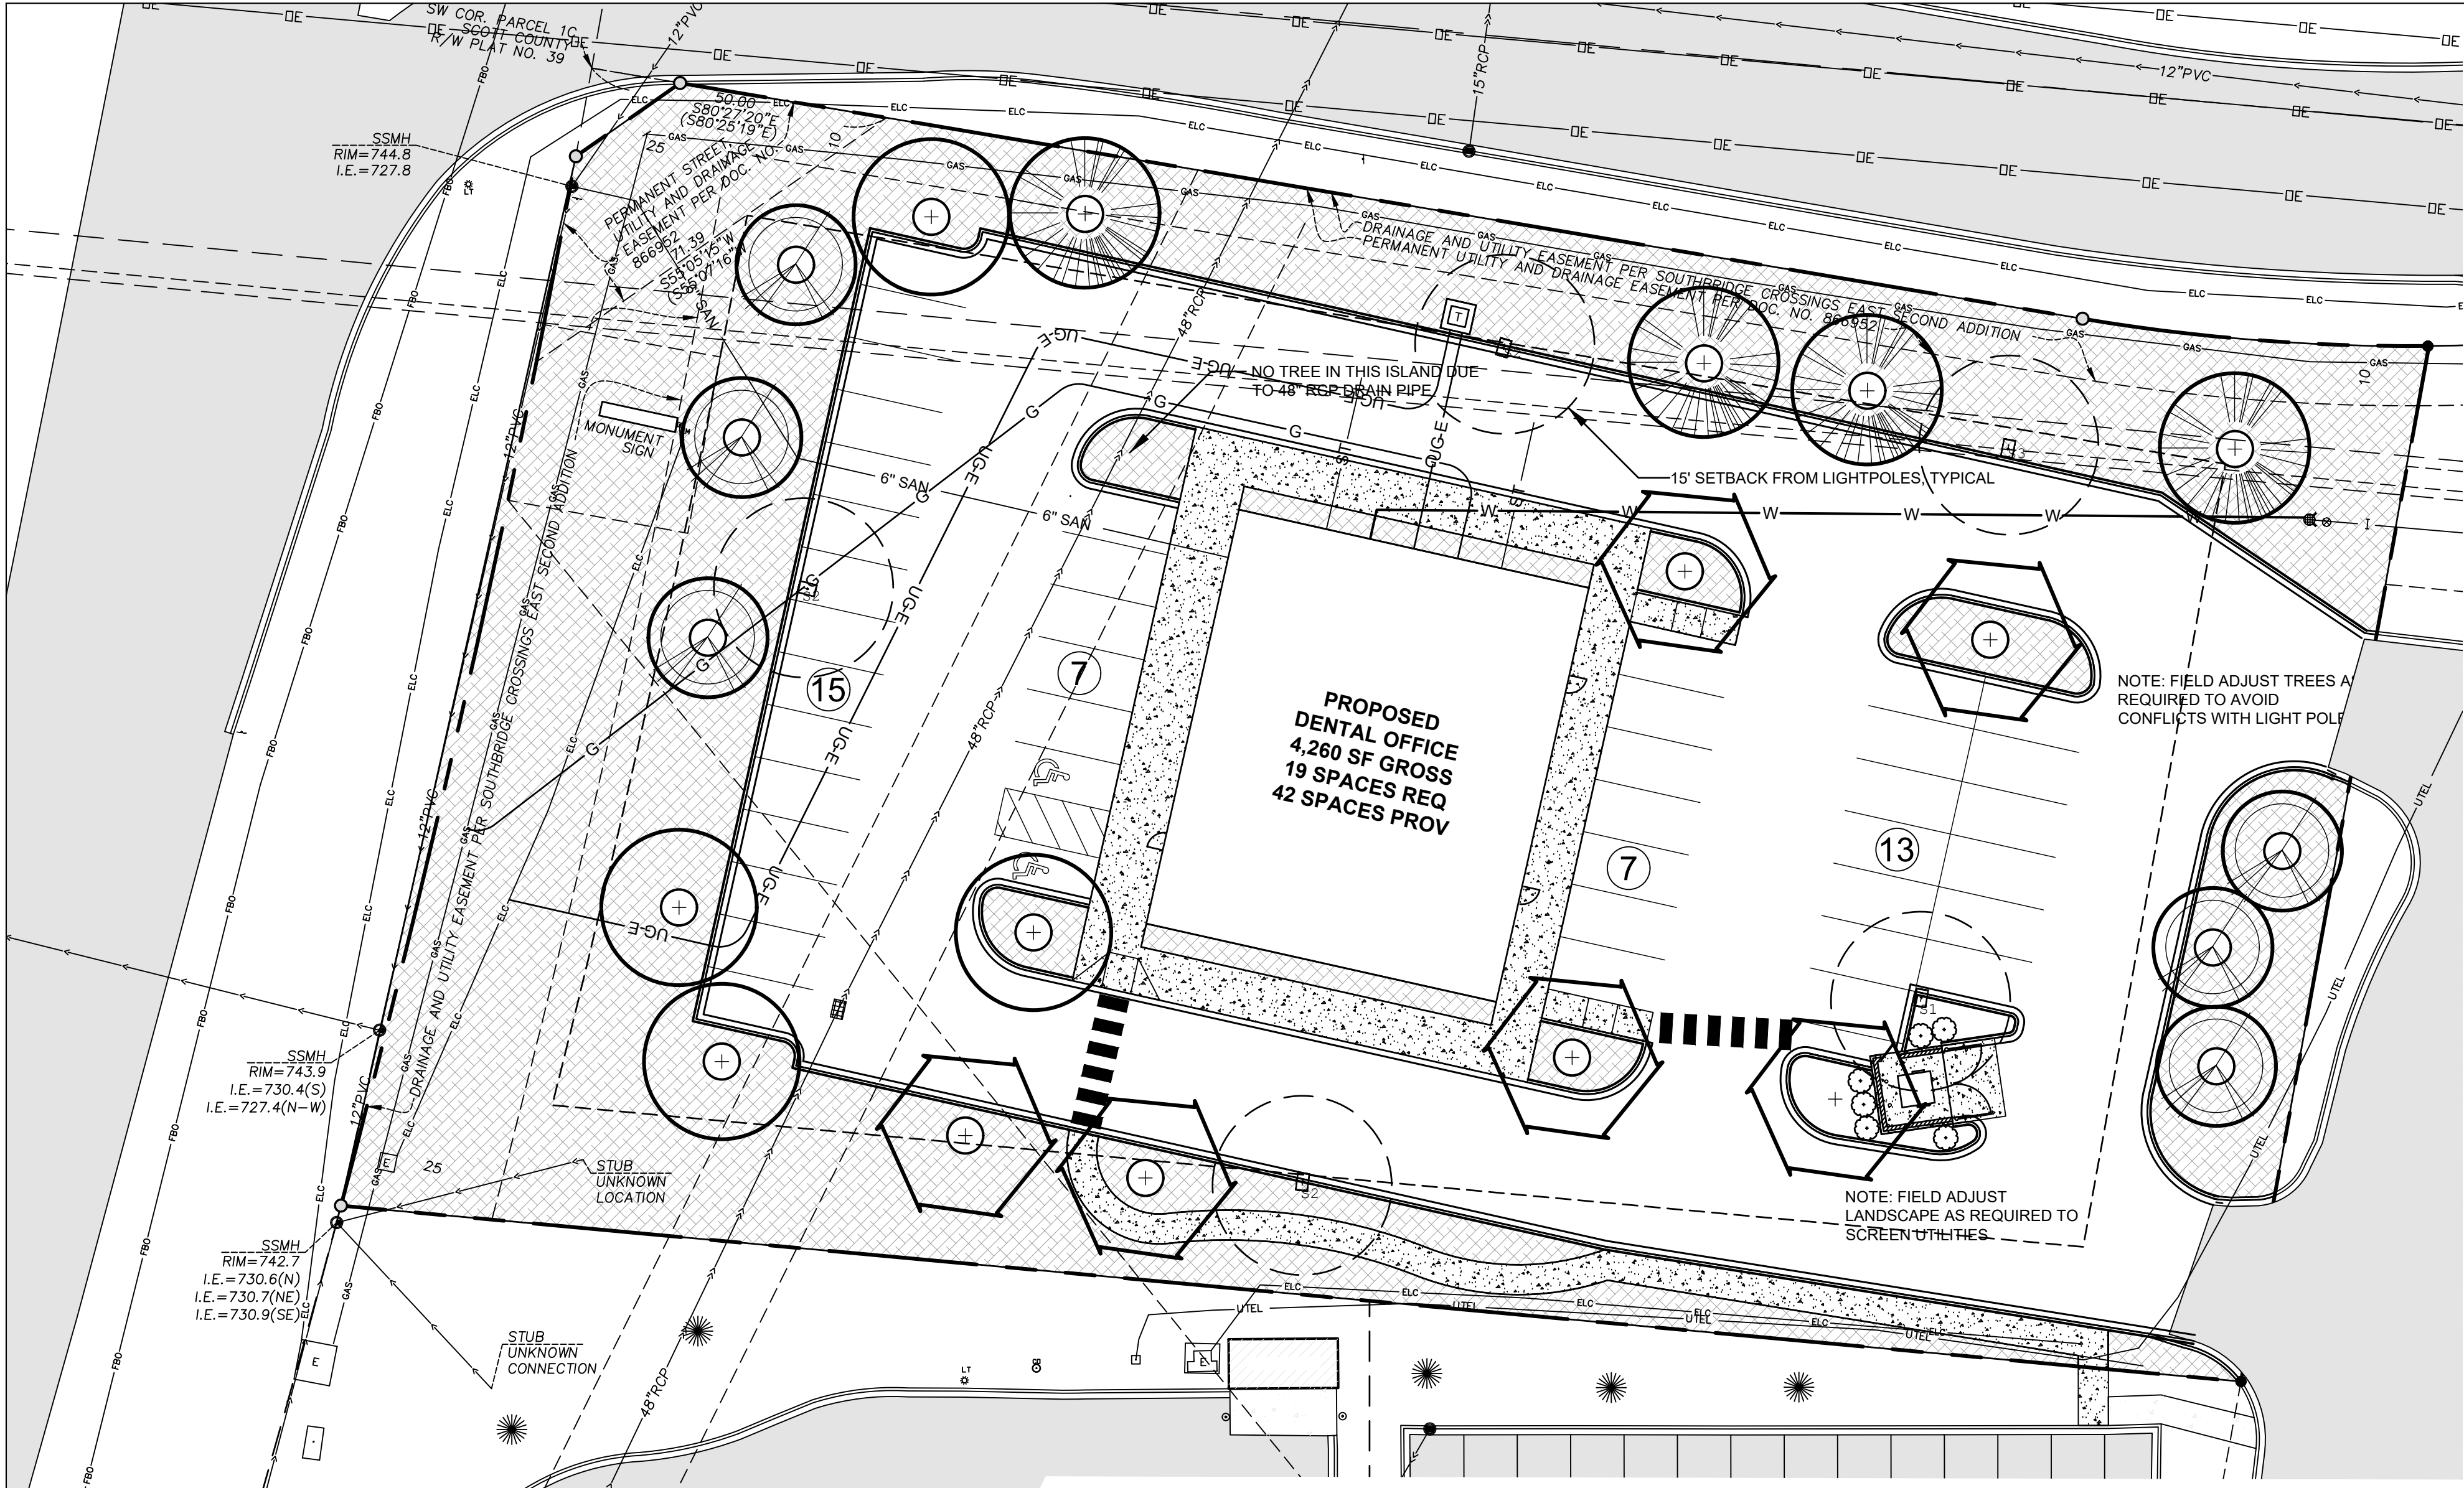


6 LEATHERLEAF VIBURNUM
VIBURNUM RHYTIDOPHYLLUM
5 GAL. 4' O.C.




6 BABY BLUE COLORADO SPRUCE
PICEA PUNGENS 'BABY BLUE'
6' B&B



4 BLACK HILLS SPRUCE
PICEA GLAUCA 'DENSATA'
6' B&B



6 'SHADEMASTER' HONEY LOCUST
GLEDITISA TRIACANTHOS 'SHADEMASTER'
2.5" CALIPER B&B



4 'HIS MAJESTY' CORKTREE
PHELLODENDRON AMURENSE 'HIS MAJESTY'
2.5" CALIPER B&B


TOP OF ROOTBALL LEVEL WITH OR
SLIGHTLY ABOVE SURROUNDING GRADE.

REMOVE CONTAINER BEFORE PLANTING.
CLEANLY PRUNE ANY ENCIRCLING ROOTS.

MULCH — SEE LANDSCAPE NOTES. NO
MORE THAN 1" OF MULCH ON TOP OF
ROOT BALL



LOOSENE SOIL. DIG AND TURN SOIL TO
REDUCE COMPACTION TO THE AREA AND
DEPTH SHOWN

BOTTOM OF ROOT BALL RESTS ON
EXISTING OR RECOMPACTED SOIL.

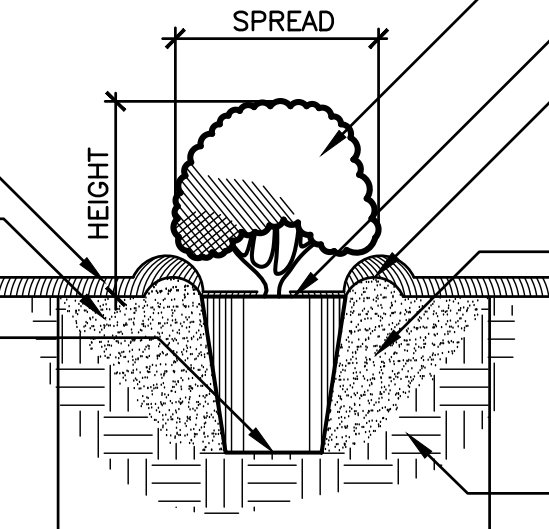

NOTE: MEASURE HEIGHT FROM TOP OF ROOT BALL
SEE PLANT SCHEDULE FOR REQUIRED HEIGHT AND
SPREAD FOR EACH SPECIES

2 PLANTING DETAIL FOR SHRUBS
LP1 SCALE: NOT TO SCALE

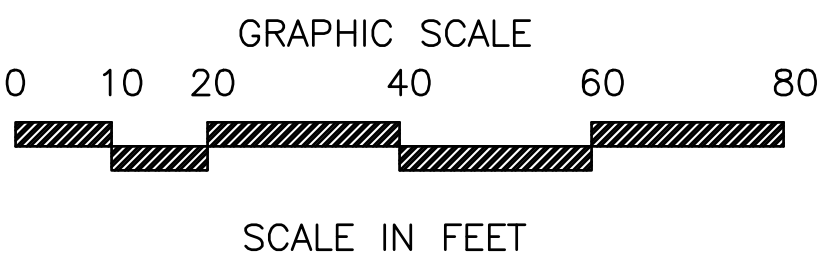

CLEANLY PRUNE ONLY DAMAGED,
DISEASED AND/OR WEAK BRANCHES.

ROOTBALL


4" HIGH X 8" WIDE ROUND-TOPPED
SOIL BERM ABOVE ROOT BALL
SURFACE SHALL BE CONSTRUCTED
AROUND THE ROOT BALL. BERM SHALL
BEGIN AT ROOT BALL PERIPHERY

PRIOR TO MULCHING, LIGHTLY TAMP
SOIL AROUND THE ROOTBALL IN 6"
LIFTS TO BRACE TREE. DO NOT OVER
COMPACT. WHEN THE PLANTING HOLE
HAS BEEN BACKFILLED, POUR WATER
AROUND THE ROOT BALL TO SETTLE
THE SOIL

EXISTING SOIL

NOTES:
1. REMOVE ALL STRING &/OR WIRE WRAPPED AROUND TRUNK.
2. REMOVE ALL STRAPS, ROPES, WIRE &/OR STRINGS USED TO LIFT THE ROOTBALL.
3. REMOVE ALL BURLAP &/OR WIRE FROM THE TOP OF THE ROOT BALL.
4. TOP OF FIRST FEEDER ROOT TO BE SET SLIGHTLY ABOVE SURROUNDING FINISH GRADE.

1 TREE PLANTING
LP1 SCALE: NOT TO SCALE

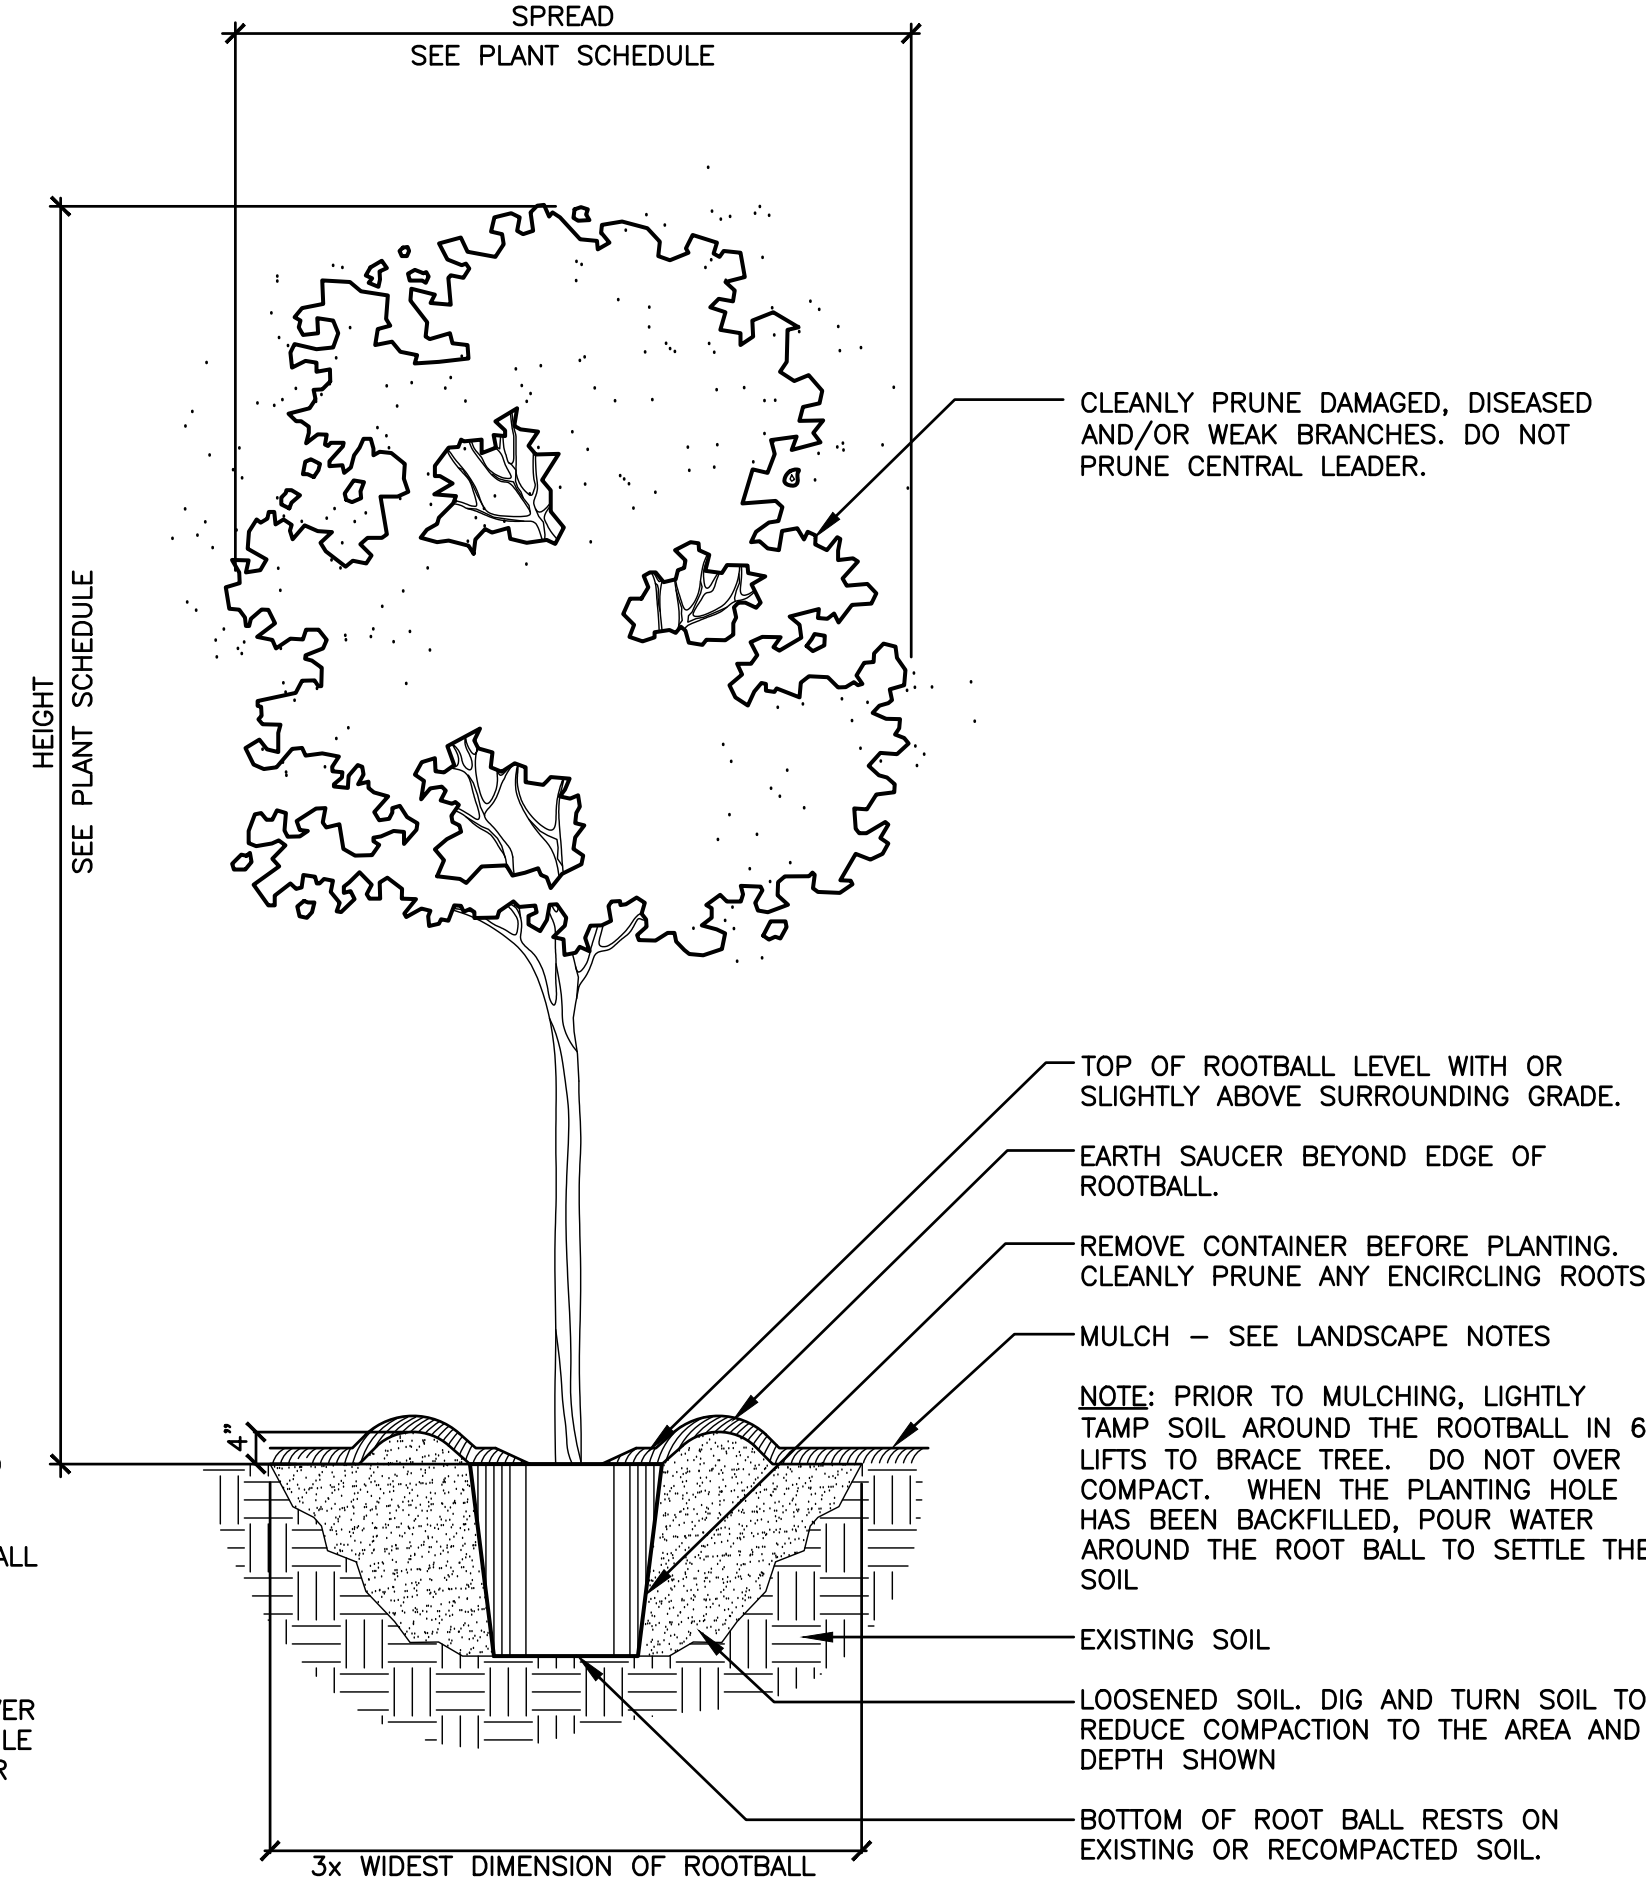

- LANDSCAPE NOTES:
1. LOCATE ALL UTILITIES BEFORE DIGGING. PROTECT ALL UTILITIES FROM DAMAGE DURING CONSTRUCTION.
 2. ELIMINATE EXISTING VEGETATION IN AREAS TO BE PLANTED. SPRAY WITH ROUNDUP AT MANUFACTURER'S RECOMMENDED RATE TWICE IN 14 DAYS.
 3. TOP DRESS ALL AREAS TO RECEIVE PLANTINGS WITH 2" FINISHED MUSHROOM COMPOST PRIOR TO PLANTING.
 4. ALL PLANT MATERIAL ANZI Z60.1 OR BETTER.
 5. DECREASE PLANT SPACING AS REQUIRED TO ALLOW PLACEMENT OF THE DESIGNATED NUMBER OF PLANTS PER GROUPING.
 6. FERTILIZE ALL PLANTINGS WITH OSMOCOTE OR OTHER APPROVED SLOW RELEASE FERTILIZER AT MANUFACTURER'S RECOMMENDED RATE BEFORE PLACING MULCH.
 7. APPLY PREEN OR OTHER APPROVED PRE-EMERGENT HERBICIDE TO ALL PLANTING AREAS BEFORE PLACING MULCH.
 8. MULCH ALL AREAS OF TREE, SHRUB AND GROUND COVER MASS PLANTINGS WITH 4" DEEP SHREDDED CEDAR MULCH.
 9. QUANTITIES SHOWN IN PLANT LIST ARE FOR CONTRACTOR'S CONVENIENCE. VERIFY ALL PLANT QUANTITIES SHOWN ON PLAN AND IN PLANT LIST.
 10. B&B MATERIAL MAY BE SUBSTITUTED FOR CONTAINER GROWN MATERIAL PROVIDED IT EXCEEDS THE MINIMUM SIZES NOTED.
 11. SOD ALL DISTURBED AREAS WITH SPECIES SHOWN ON PLAN.
 12. WARRANTY ALL PLANTS FOR A PERIOD OF ONE (1) YEAR FROM FINAL ACCEPTANCE.

BUILDING TREES		
REQUIRED	REQUIRED	PROVIDED
2 TREES PER 1,000 S.F. BLDG.	FOR 4,260 S.F. BLDG.	
	9 TREES	9 TREES

PARKING AREA		
REQUIRED	REQUIRED	PROVIDED
PER 4,000 SF IMPERVIOUS AREA	FOR 26,005 SF IMPERVIOUS AREA	7 TREES
1 CANOPY TREE	7 TREES	

PARKING AREA		
REQUIRED	REQUIRED	PROVIDED
PER 10 PARKING SPACES	FOR 42 SPACES	5 TREES
1 CANOPY TREE	5 TREES	

OVERALL REQUIREMENT - (15% LANDSCAPE REQUIREMENT)

TOTAL SITE AREA	LANDSCAPE AREA REQUIRED	LANDSCAPE AREA PROVIDED
57,373 SQ. FT.	8,606 SQ. FT. (15%)	22,730 SQ. FT. (40%)

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Landscape Architect under the laws of the State of Minnesota.

Print Name: Tim A. Huber

Signature:

Date: 7/01/2021 License # 57658



8650 E. STATE ROAD 32
ZIONSVILLE, IN 46077
PHONE: 615-829-0331
EMAIL: DYLAN@TARR-GROUP.COM

SHAKOPEE DENTAL OFFICE
WMG DEVELOPMENT, LLC
8350 HANSEN AVENUE
SHAKOPEE, MINNESOTA 55379

ORIGINAL ISSUE DATE: 07/02/2021

REVISIONS:

PROJ. NO.: 21027

LP1