

All parts to be galvanized
All bar ends to be de-burred prior to galvanizing

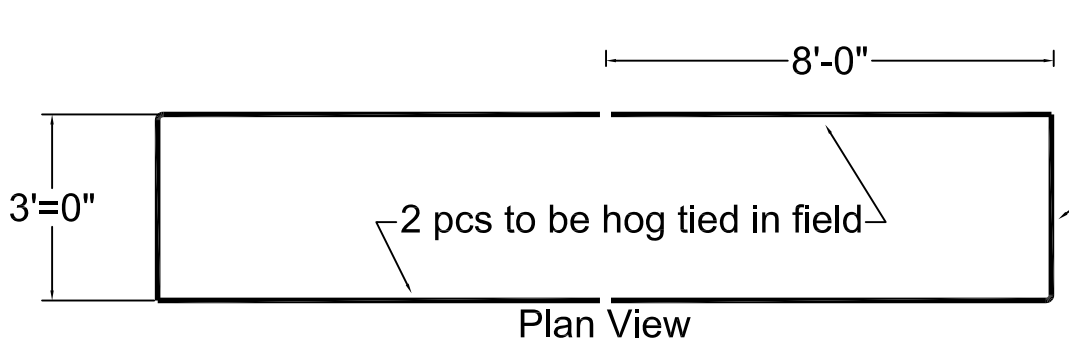

Plan View

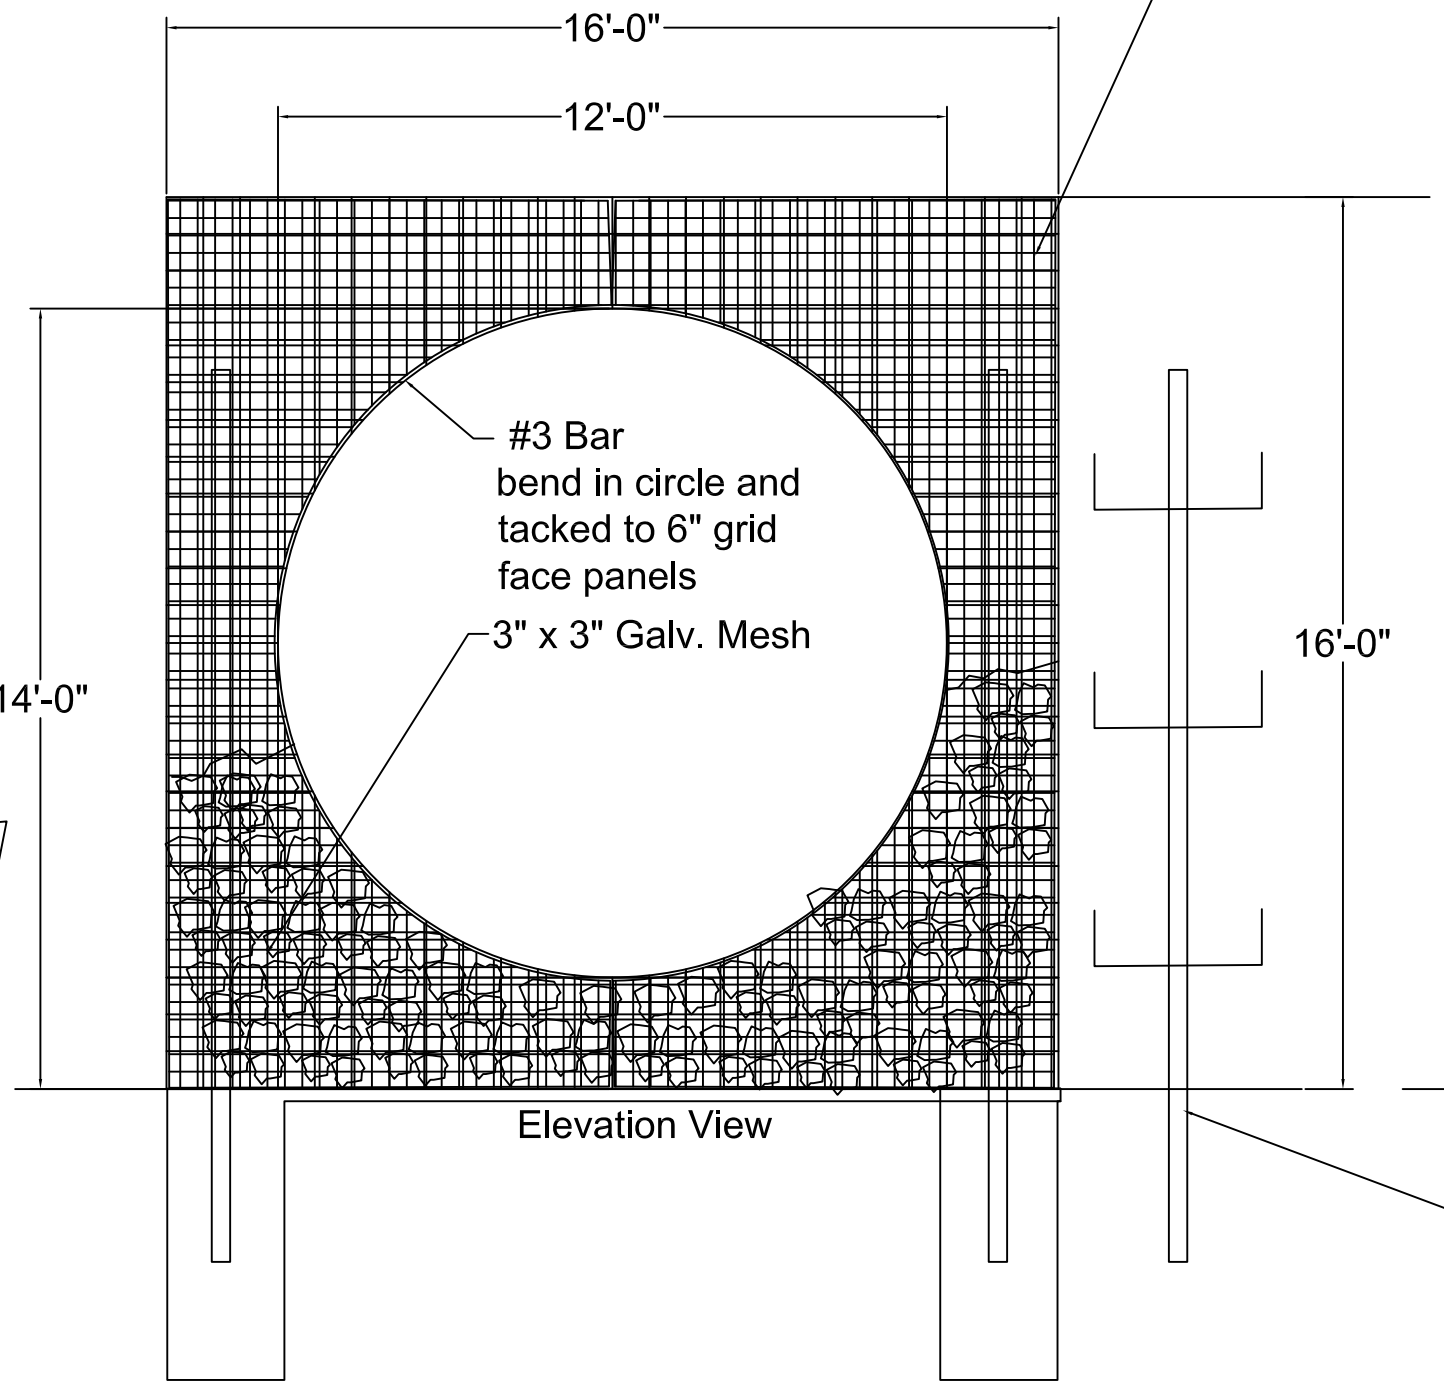



Elevation View

6"x6" Grid
#3 Bar
(2) 16' x 16' Face panels w/ 90
degree bends 3' x 16' Side
2 pcs to be hog tied together in field

#3 Bar
(20) 3' x 1' 'reinforcement staples'

6"x6" Grid
#3 Bar
(1) 3' x 16' Top

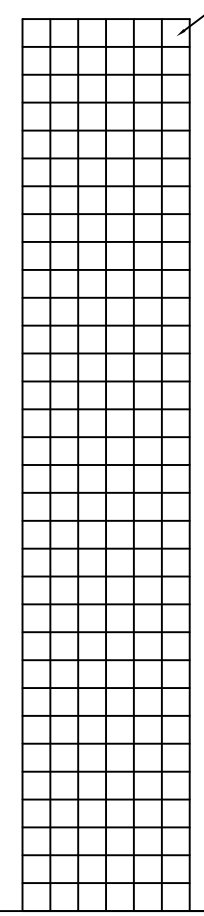

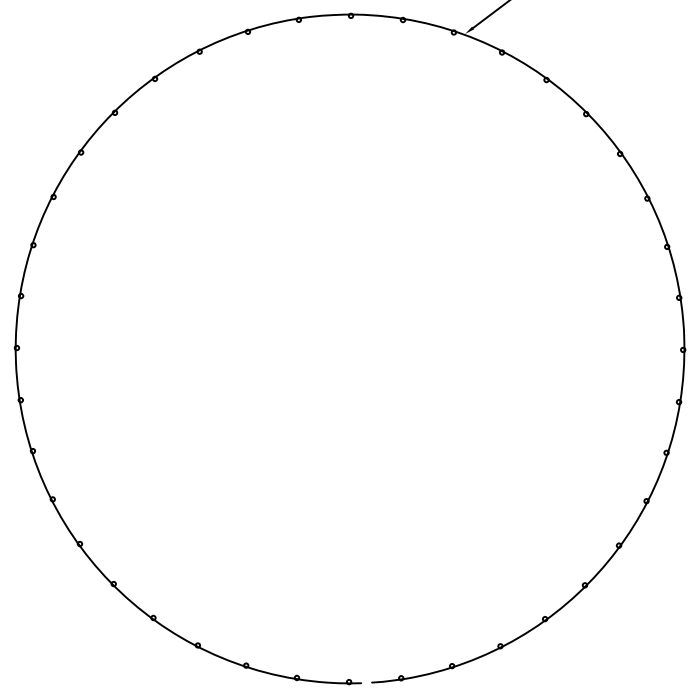

6"x6" Grid
#3 Bar
(1) 33.5' x 3' Interior circle grid
2 pcs if required to be hog tied
to face circle in field

(2) 6"x6" Steel Reinforcement Post
16' long w/ welded 3' rebar
attachment arms to be hog tied
together in field