



**KRAUS-ANDERSON®**  
Construction Company

## Change Order Request

**Project:** 2410068-02  
City of Shakopee - SandVenture  
1101 Adams Street South  
Shakopee, MN 55379

**COR #** 15.00

**Date:** 5/9/2024

**To: Owner** City of Shakopee  
485 Gorman Street  
Shakopee, MN 55379

**From:** Kraus-Anderson Construction Company  
501 South Eighth Street  
Minneapolis, MN 55404

**PCO #** 34 - SEH SI 07: Earthwork Changes

| Item #                        | Description                                                                                                                                                                                                                                                                                                                                            | Vendor                    | Amount              |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------------|
| 1                             | Earthwork changes<br><i>KA Description: This cost was from changes made by SPUC to the utilities.<br/>There will be separate credits coming along for some work that was removed, these will be reviewed by Alex at the City.<br/>The costs in this change have been reviewed with the city and found to be in line with the work being completed.</i> | S.M. Hentges & Sons, Inc. | \$198,009.56        |
| <b>Total For Change Order</b> |                                                                                                                                                                                                                                                                                                                                                        |                           | <b>\$198,009.56</b> |

**Approved By:** City of Shakopee

**Signed:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Submitted By:** Kraus-Anderson Construction Company

**Signed:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Accepted By:** Confluence

**Signed:** \_\_\_\_\_

**Date:** \_\_\_\_\_

SM Hentges  
650 Quaker Ave  
Jordan, MN  
Project Manager: Justin Rice

## Shakopee SandVenture

Date : 3/14/24

PCO #:

PR/SI #

### COST SUMMARY

| Description                         | Cost                 | Notes/Attachments                         |
|-------------------------------------|----------------------|-------------------------------------------|
| Labor Total                         | \$ 68,928.00         | (Auto Fill from Sub-Total Below)          |
| Materials and Equipment Total       | \$ 110,183.42        | (Auto Fill from Sub-Total Below)          |
| Tax on Materials and Equipment Only | \$ -                 | <<< Provide Sales/Use Tax Total           |
| <b>Self Performed Subtotal</b>      | <b>\$ 179,111.42</b> |                                           |
| 10% Overhead and Profit             | \$ 17,911.14         | (10% is the max fee allowed on CO's)      |
| <b>Self Performed Total</b>         | <b>\$ 197,022.56</b> |                                           |
| Subcontractors                      | \$ 940.00            | Auto Fill from Sub-Total Below            |
| 5% Overhead and Profit on Subs      | \$ 47.00             | (5% is the max allowed on subcontractors) |
| <b>Subcontractor Total</b>          | <b>\$ 987.00</b>     |                                           |
| <b>TOTAL COST OF CHANGE</b>         | <b>\$ 198,009.56</b> |                                           |

Signature: \_\_\_\_\_

Contractor acknowledges no other Costs associated with this PCO.

### PROVIDE DETAIL BREAKDOWN BELOW:

| Labor By Task                   |  | Qty                                    | Unit | Unit Cost | Total Cost   |
|---------------------------------|--|----------------------------------------|------|-----------|--------------|
| Operator                        |  | 204                                    | HR   | \$ 113.00 | \$ 23,052.00 |
| Foreman                         |  | 79                                     | HR   | \$ 194.00 | \$ 15,326.00 |
| Laborer                         |  | 149                                    | HR   | \$ 110.00 | \$ 16,390.00 |
| Cement Mason                    |  | 118                                    | HR   | \$ 120.00 | \$ 14,160.00 |
| Sub-Total                       |  |                                        |      | \$        | 68,928.00    |
| Materials and Equipment By Task |  | Qty                                    | Unit | Unit Cost | Total Cost   |
| Concrete                        |  | 12                                     | CY   | 180       | \$ 2,160.00  |
| Loader                          |  | 48                                     | HR   | 129       | \$ 6,192.00  |
| Excavator                       |  | 66                                     | HR   | 66        | \$ 4,356.00  |
| Compactor                       |  | 94                                     | HR   | 84        | \$ 7,896.00  |
| Watermain Materials             |  | 1                                      | LS   | 77211.67  | \$ 77,211.67 |
| Bituminous Mix                  |  | 1000                                   | SF   | 3         | \$ 3,000.00  |
| Dump Fees                       |  | 1                                      | LS   | 45        | \$ 45.00     |
| Paver                           |  | 8                                      | HR   | 101       | \$ 808.00    |
| Sub-Total                       |  |                                        |      | \$        | 101,668.67   |
| Sub-Contractor Proposals        |  | Description of Work                    |      |           | Total Cost   |
| Trucking                        |  | Export additional material             |      |           | \$ 140.00    |
| GPRS                            |  | Private locates south and west of pool |      |           | \$ 800.00    |
|                                 |  |                                        |      |           | \$ -         |
|                                 |  |                                        |      |           | \$ -         |
| Sub-Total                       |  | (Attach Sub-Contractor Proposals)      |      |           | \$ 940.00    |



PCO #007

S.M. Hentges & Sons, Inc  
650 Quaker Avenue  
Jordan, Minnesota 55352  
Phone: (952) 492-5700

Project: 23-1290 - City of Shakopee - Sand Venture Shakopee, MN  
1101 Adams St. S.  
Shakopee, Minnesota 55379

## Prime Contract Potential Change Order #007: CE #009 - Revised Water Plans per City

|                        |                                                                    |                                       |                                                                          |
|------------------------|--------------------------------------------------------------------|---------------------------------------|--------------------------------------------------------------------------|
| TO:                    | City of Shakopee<br>458 Gorman Street<br>Shakopee, Minnesota 55379 | FROM:                                 | S.M. Hentges & Sons Inc.<br>650 Quaker Avenue<br>Jordan, Minnesota 55352 |
| PCO NUMBER/REVISION:   | 007 / 0                                                            | CONTRACT:                             | Sand -                                                                   |
| REQUEST RECEIVED FROM: |                                                                    | CREATED BY:                           | Justin Rice (S.M. Hentges & Sons Inc.)                                   |
| STATUS:                | Pending - Pricing                                                  | CREATED DATE:                         | 3/5/2024                                                                 |
| REFERENCE:             |                                                                    | PRIME CONTRACT<br>CHANGE ORDER:       | None                                                                     |
| FIELD CHANGE:          | No                                                                 |                                       |                                                                          |
| LOCATION:              |                                                                    | ACCOUNTING METHOD:                    | Unit/Quantity Based                                                      |
| SCHEDULE IMPACT:       |                                                                    | PAID IN FULL:                         | No                                                                       |
| EXECUTED:              | No                                                                 | SIGNED CHANGE ORDER<br>RECEIVED DATE: |                                                                          |
|                        |                                                                    | TOTAL AMOUNT:                         | \$198,009.57                                                             |

POTENTIAL CHANGE ORDER TITLE: CE #009 - Revised Water Plans per City

CHANGE REASON: Design Change

### POTENTIAL CHANGE ORDER DESCRIPTION: (The Contract Is Changed As Follows)

CE #009 - Revised Water Plans per City

This work change order request is based off the approach of zeroing out CO #1, adding in the work from BP #3 that has already been completed, and then adding in the work associated with the redesigned water main plan.

#### Exclusions:

- 1) SMH is assuming that up to 60% of the sidewalk between Adams St. S. and the pedestrian crossing east of the pond will be damaged by the new watermain installation. We'll work to minimize damage but we are assuming that the restoration of this walk will be by others.
- 2) SMH understands that some of the existing water main may be abandoned and sand filled. As we were not told the exact extents of this work we have not included any pricing for that work. If the extents of this work can be provided on an aerial image or plan sheet we can put together a proposal to do this work.
- 3) SMH is excluding dewatering due to the lack of borings in this area of the project.

#### ATTACHMENTS:

[Plumbing Mark up.pdf](#) , [Watermain Re-Design - Sandventure.pdf](#)

| # | Cost Code                   | Description             | Type      | Qty | Units | Unit Cost   | Pre-Markup Subtotal | Prime markup (10.00% Applies to Admin, Labor, Equipment, Materials, Owner Cost, Professional Services, and Other.) | Subcontractor Markup (5.00% Applies to Commitment.) | Subtotal    |
|---|-----------------------------|-------------------------|-----------|-----|-------|-------------|---------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------|
| 1 | 620-999-E - EXTRA WORK #010 | Final Water Main Design | Equipment | 1.0 | LS    | \$21,412.07 | \$21,412.07         | \$2,141.21                                                                                                         | \$0.00                                              | \$23,553.28 |
| 2 | 620-999-L - EXTRA WORK #010 | Final Water Main Design | Labor     | 1.0 | LS    | \$68,928.00 | \$68,928.00         | \$6,892.80                                                                                                         | \$0.00                                              | \$75,820.80 |



| #            | Cost Code                   | Description             | Type       | Qty | Units | Unit Cost   | Pre-Markup Subtotal | Prime markup (10.00% Applies to Admin, Labor, Equipment, Materials, Owner Cost, Professional Services, and Other.) | Subcontractor Markup (5.00% Applies to Commitment.) | Subtotal     |
|--------------|-----------------------------|-------------------------|------------|-----|-------|-------------|---------------------|--------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|--------------|
| 3            | 620-999-M - EXTRA WORK #010 | Final Water Main Design | Materials  | 1.0 | LS    | \$88,771.35 | \$88,771.35         | \$8,877.14                                                                                                         | \$0.00                                              | \$97,648.49  |
| 4            | 620-999-S - EXTRA WORK #010 | Final Water Main Design | Commitment | 1.0 | LS    | \$940.00    | \$940.00            | \$0.00                                                                                                             | \$47.00                                             | \$987.00     |
| Subtotal:    |                             |                         |            |     |       |             | \$180,051.42        | \$17,911.15                                                                                                        | \$47.00                                             | \$198,009.57 |
| Grand Total: |                             |                         |            |     |       |             |                     |                                                                                                                    |                                                     | \$198,009.57 |


S.M. Hentges & Sons Inc.  
650 Quaker Avenue  
Jordan, Minnesota 55352


SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_

| Final Utility Design & K-A Scope |              |          |       |               |              |               |                                                                                                    |
|----------------------------------|--------------|----------|-------|---------------|--------------|---------------|----------------------------------------------------------------------------------------------------|
| Unit                             | Rate         | Quantity | Units | Extension     | M/U          | Total         | Notes                                                                                              |
|                                  |              |          |       | \$ 180,053.46 | \$ 17,956.10 | \$ 198,009.56 |                                                                                                    |
| Materials                        | \$ (12.47)   | 416.00   | LF    | \$ (5,187.52) | \$ (518.75)  | \$ (5,706.27) | Change 2" copper to 2" PVC Sch. 80                                                                 |
| Excavator w/ operator            | \$ 293.00    | 4.00     | HR    | \$ 1,172.00   | \$ 117.20    | \$ 1,289.20   | Remove added C&G, walk, bitumionous, and signage                                                   |
| Loader w/ operator               | \$ 242.00    | 4.00     | HR    | \$ 968.00     | \$ 96.80     | \$ 1,064.80   | Remove added C&G, walk, bitumionous, and signage                                                   |
| Laborer                          | \$ 110.00    | 8.00     | HR    | \$ 880.00     | \$ 88.00     | \$ 968.00     | Remove added C&G, walk, bitumionous, and signage                                                   |
| Foreman w/ truck                 | \$ 194.00    | 4.00     | HR    | \$ 776.00     | \$ 77.60     | \$ 853.60     | Remove added C&G, walk, bitumionous, and signage                                                   |
| Compactor w/ op                  | \$ 204.00    | 4.00     | HR    | \$ 816.00     | \$ 81.60     | \$ 897.60     | Remove added C&G, walk, bitumionous, and signage                                                   |
| Quad Axles Truck                 | \$ 140.00    | 1.00     | HR    | \$ 140.00     | \$ 7.00      | \$ 147.00     | Dispose of removed C&G, walk, and bituminous.                                                      |
| Dump Fees                        | \$ 45.00     | 1.00     | LS    | \$ 45.00      | \$ 2.25      | \$ 47.25      | Dump fees for small qty C&G, walk, and bituminous                                                  |
| Laborer                          | \$ 110.00    | 4.00     | HR    | \$ 440.00     | \$ 44.00     | \$ 484.00     | Set and reinstall wood sign                                                                        |
| Concrete                         | \$ 180.00    | 1.00     | LS    | \$ 180.00     | \$ 18.00     | \$ 198.00     | Short load of concrete for filling sign post holes                                                 |
| 8" Fittings                      | \$ 13,750.01 | 1.00     | LS    | \$ 13,750.01  | \$ 1,375.00  | \$ 15,125.01  | 8" Fittings                                                                                        |
| 8" Watermain                     | \$ 44.33     | 814.80   | LF    | \$ 36,116.32  | \$ 3,611.63  | \$ 39,727.95  | 8" Main                                                                                            |
| Excavator w/ operator            | \$ 293.00    | 30.00    | HR    | \$ 8,790.00   | \$ 879.00    | \$ 9,669.00   | Install 8" Main and fittings including 1.5" service to log cabin                                   |
| Loader w/ operator               | \$ 242.00    | 30.00    | HR    | \$ 7,260.00   | \$ 726.00    | \$ 7,986.00   | Install 8" Main and fittings including 1.5" service to log cabin                                   |
| Laborer                          | \$ 110.00    | 60.00    | HR    | \$ 6,600.00   | \$ 660.00    | \$ 7,260.00   | Install 8" Main and fittings including 1.5" service to log cabin                                   |
| Foreman w/ truck                 | \$ 194.00    | 30.00    | HR    | \$ 5,820.00   | \$ 582.00    | \$ 6,402.00   | Install 8" Main and fittings including 1.5" service to log cabin                                   |
| Compactor w/ op                  | \$ 204.00    | 30.00    | HR    | \$ 6,120.00   | \$ 612.00    | \$ 6,732.00   | Install 8" Main and fittings including 1.5" service to log cabin                                   |
| Excavator w/ operator            | \$ 293.00    | 6.00     | HR    | \$ 1,758.00   | \$ 175.80    | \$ 1,933.80   | Install 3 Hydrants and associated 6" DIP                                                           |
| Loader w/ operator               | \$ 242.00    | 6.00     | HR    | \$ 1,452.00   | \$ 145.20    | \$ 1,597.20   | Install 3 Hydrants and associated 6" DIP                                                           |
| Foreman w/ truck                 | \$ 194.00    | 6.00     | HR    | \$ 1,164.00   | \$ 116.40    | \$ 1,280.40   | Install 3 Hydrants and associated 6" DIP                                                           |
| Laborer                          | \$ 110.00    | 12.00    | HR    | \$ 1,320.00   | \$ 132.00    | \$ 1,452.00   | Install 3 Hydrants and associated 6" DIP                                                           |
| Compactor w/ op                  | \$ 204.00    | 6.00     | HR    | \$ 1,224.00   | \$ 122.40    | \$ 1,346.40   | Install 3 Hydrants and associated 6" DIP                                                           |
| Hydrants                         | \$ 7,462.82  | 3.00     | EA    | \$ 22,388.47  | \$ 2,238.85  | \$ 24,627.31  | 3 Hydrants w/ gate valves                                                                          |
| 6" DIP                           | \$ 29.48     | 16.00    | LF    | \$ 471.74     | \$ 47.17     | \$ 518.91     | 6" DIP materials                                                                                   |
| Connect exist 1.5" service       | \$ 1,807.15  | 1.00     | EA    | \$ 1,807.15   | \$ 180.72    | \$ 1,987.87   | Materials for new service connection to the log cabin                                              |
| 4" DIP riser and extension       | \$ -         | 1.00     | EA    | \$ -          | \$ -         | \$ -          | Will salvage previous 4" fire Line                                                                 |
| Excavator w/ operator            | \$ 293.00    | 9.00     | HR    | \$ 2,637.00   | \$ 263.70    | \$ 2,900.70   | Install new 1.5", 2" and 4" blow out assemblies                                                    |
| Loader w/ operator               | \$ 242.00    | 9.00     | HR    | \$ 2,178.00   | \$ 217.80    | \$ 2,395.80   | Install new 1.5", 2" and 4" blow out assemblies                                                    |
| Laborer                          | \$ 110.00    | 18.00    | HR    | \$ 1,980.00   | \$ 198.00    | \$ 2,178.00   | Install new 1.5", 2" and 4" blow out assemblies                                                    |
| Foreman w/ truck                 | \$ 194.00    | 9.00     | HR    | \$ 1,746.00   | \$ 174.60    | \$ 1,920.60   | Install new 1.5", 2" and 4" blow out assemblies                                                    |
| Compactor w/ op                  | \$ 204.00    | 9.00     | HR    | \$ 1,836.00   | \$ 183.60    | \$ 2,019.60   | Install new 1.5", 2" and 4" blow out assemblies                                                    |
| 1.5" Blow out assembly           | \$ 929.86    | 1.00     | EA    | \$ 929.86     | \$ 92.99     | \$ 1,022.84   | New Blow out assembly                                                                              |
| 2" Blow out assembly             | \$ 600.40    | 1.00     | EA    | \$ 600.40     | \$ 60.04     | \$ 660.44     | New Blow out assembly                                                                              |
| 4" Blow out assembly             | \$ 2,187.01  | 1.00     | EA    | \$ 2,187.01   | \$ 218.70    | \$ 2,405.71   | New Blow out assembly                                                                              |
| Vaults                           | \$ 250.00    | 3.00     | EA    | \$ 750.00     | \$ 75.00     | \$ 825.00     | Vault needed based upon assumption of using curb stops for 1.5" and 2"                             |
| Excavator w/ operator            | \$ 293.00    | -6.00    | HR    | \$ (1,758.00) | \$ (175.80)  | \$ (1,933.80) | Credit for 6" C900 not installed from base bid                                                     |
| Loader w/ operator               | \$ 242.00    | -6.00    | HR    | \$ (1,452.00) | \$ (145.20)  | \$ (1,597.20) | Credit for 6" C900 not installed from base bid                                                     |
| Laborer                          | \$ 110.00    | -12.00   | HR    | \$ (1,320.00) | \$ (132.00)  | \$ (1,452.00) | Credit for 6" C900 not installed from base bid                                                     |
| Foreman w/ truck                 | \$ 194.00    | -6.00    | HR    | \$ (1,164.00) | \$ (116.40)  | \$ (1,280.40) | Credit for 6" C900 not installed from base bid                                                     |
| Compactor w/ op                  | \$ 204.00    | -6.00    | HR    | \$ (1,224.00) | \$ (122.40)  | \$ (1,346.40) | Credit for 6" C900 not installed from base bid                                                     |
| 6" C900 not installed            | \$ 10.15     | -370.00  | LF    | \$ (3,755.50) | \$ (375.55)  | \$ (4,131.05) | Credit for 6" C900 not installed from base bid                                                     |
| Excavator w/ operator            | \$ 293.00    | 5.00     | HR    | \$ 1,465.00   | \$ 146.50    | \$ 1,611.50   | Remove 6" Riser and replace with 8" Riser. Old 4" fire riser to become new pump house supply riser |
| Loader w/ operator               | \$ 242.00    | 5.00     | HR    | \$ 1,210.00   | \$ 121.00    | \$ 1,331.00   | Remove 6" Riser and replace with 8" Riser. Old 4" fire riser to become new pump house supply riser |
| Laborer                          | \$ 110.00    | 10.00    | HR    | \$ 1,100.00   | \$ 110.00    | \$ 1,210.00   | Remove 6" Riser and replace with 8" Riser. Old 4" fire riser to become new pump house supply riser |
| Foreman w/ truck                 | \$ 194.00    | 5.00     | HR    | \$ 970.00     | \$ 97.00     | \$ 1,067.00   | Remove 6" Riser and replace with 8" Riser. Old 4" fire riser to become new pump house supply riser |
| Compactor w/ op                  | \$ 204.00    | 5.00     | HR    | \$ 1,020.00   | \$ 102.00    | \$ 1,122.00   | Remove 6" Riser and replace with 8" Riser. Old 4" fire riser to become new pump house supply riser |
| 8" Building Riser                | \$ 1,002.38  | 1.00     | EA    | \$ 1,002.38   | \$ 100.24    | \$ 1,102.62   | 8" Building Riser                                                                                  |
| Mini-Excavator w/ operator       | \$ 293.00    | 18.00    | HR    | \$ 5,274.00   | \$ 527.40    | \$ 5,801.40   | Install new 4" C900 around west side of pool to surge tank                                         |
| Skid steer w/ operator           | \$ 204.00    | 18.00    | HR    | \$ 3,672.00   | \$ 367.20    | \$ 4,039.20   | Install new 4" C900 around west side of pool to surge tank                                         |
| Laborer                          | \$ 110.00    | 36.00    | HR    | \$ 3,960.00   | \$ 396.00    | \$ 4,356.00   | Install new 4" C900 around west side of pool to surge tank                                         |
| Foreman w/ truck                 | \$ 194.00    | 18.00    | HR    | \$ 3,492.00   | \$ 349.20    | \$ 3,841.20   | Install new 4" C900 around west side of pool to surge tank                                         |

|     |                     |              |         |    |              |             |              |                                                                                                           |
|-----|---------------------|--------------|---------|----|--------------|-------------|--------------|-----------------------------------------------------------------------------------------------------------|
| 780 | Compactor w/ op     | \$ 204.00    | 18.00   | HR | \$ 3,672.00  | \$ 367.20   | \$ 4,039.20  | Install new 4" C900 around west side of pool to surge tank                                                |
| 790 | 4" C900             | \$ 9.54      | 645.00  | LF | \$ 6,151.37  | \$ 615.14   | \$ 6,766.50  | C900 for pump house supply up to the surge tank (assumed tee and pipe from surge tank to bldg by plumber) |
| 800 | Right of Way Permit | \$ -         | 1.00    | LS | \$ -         | \$ -        | \$ -         | Right-of-Way Permit (not required per City of Shakopee)                                                   |
| 810 | Bituminous Patching | \$ 5.75      | 1000.00 | SF | \$ 5,750.00  | \$ 575.00   | \$ 6,325.00  | Patching bituminous at Adams Ave tie in                                                                   |
| 820 | Private Locates     | \$ 800.00    | 1.00    | EA | \$ 800.00    | \$ 40.00    | \$ 840.00    | Private Locates for South Side of Pool                                                                    |
| 830 | Concrete patching   | \$ 20,072.79 | 1.00    | LS | \$ 20,072.79 | \$ 2,007.28 | \$ 22,080.07 | Sidewalk and Curb and gutter patching at watermain tie in and along new watermain path.                   |
| 840 |                     |              |         |    |              |             |              |                                                                                                           |

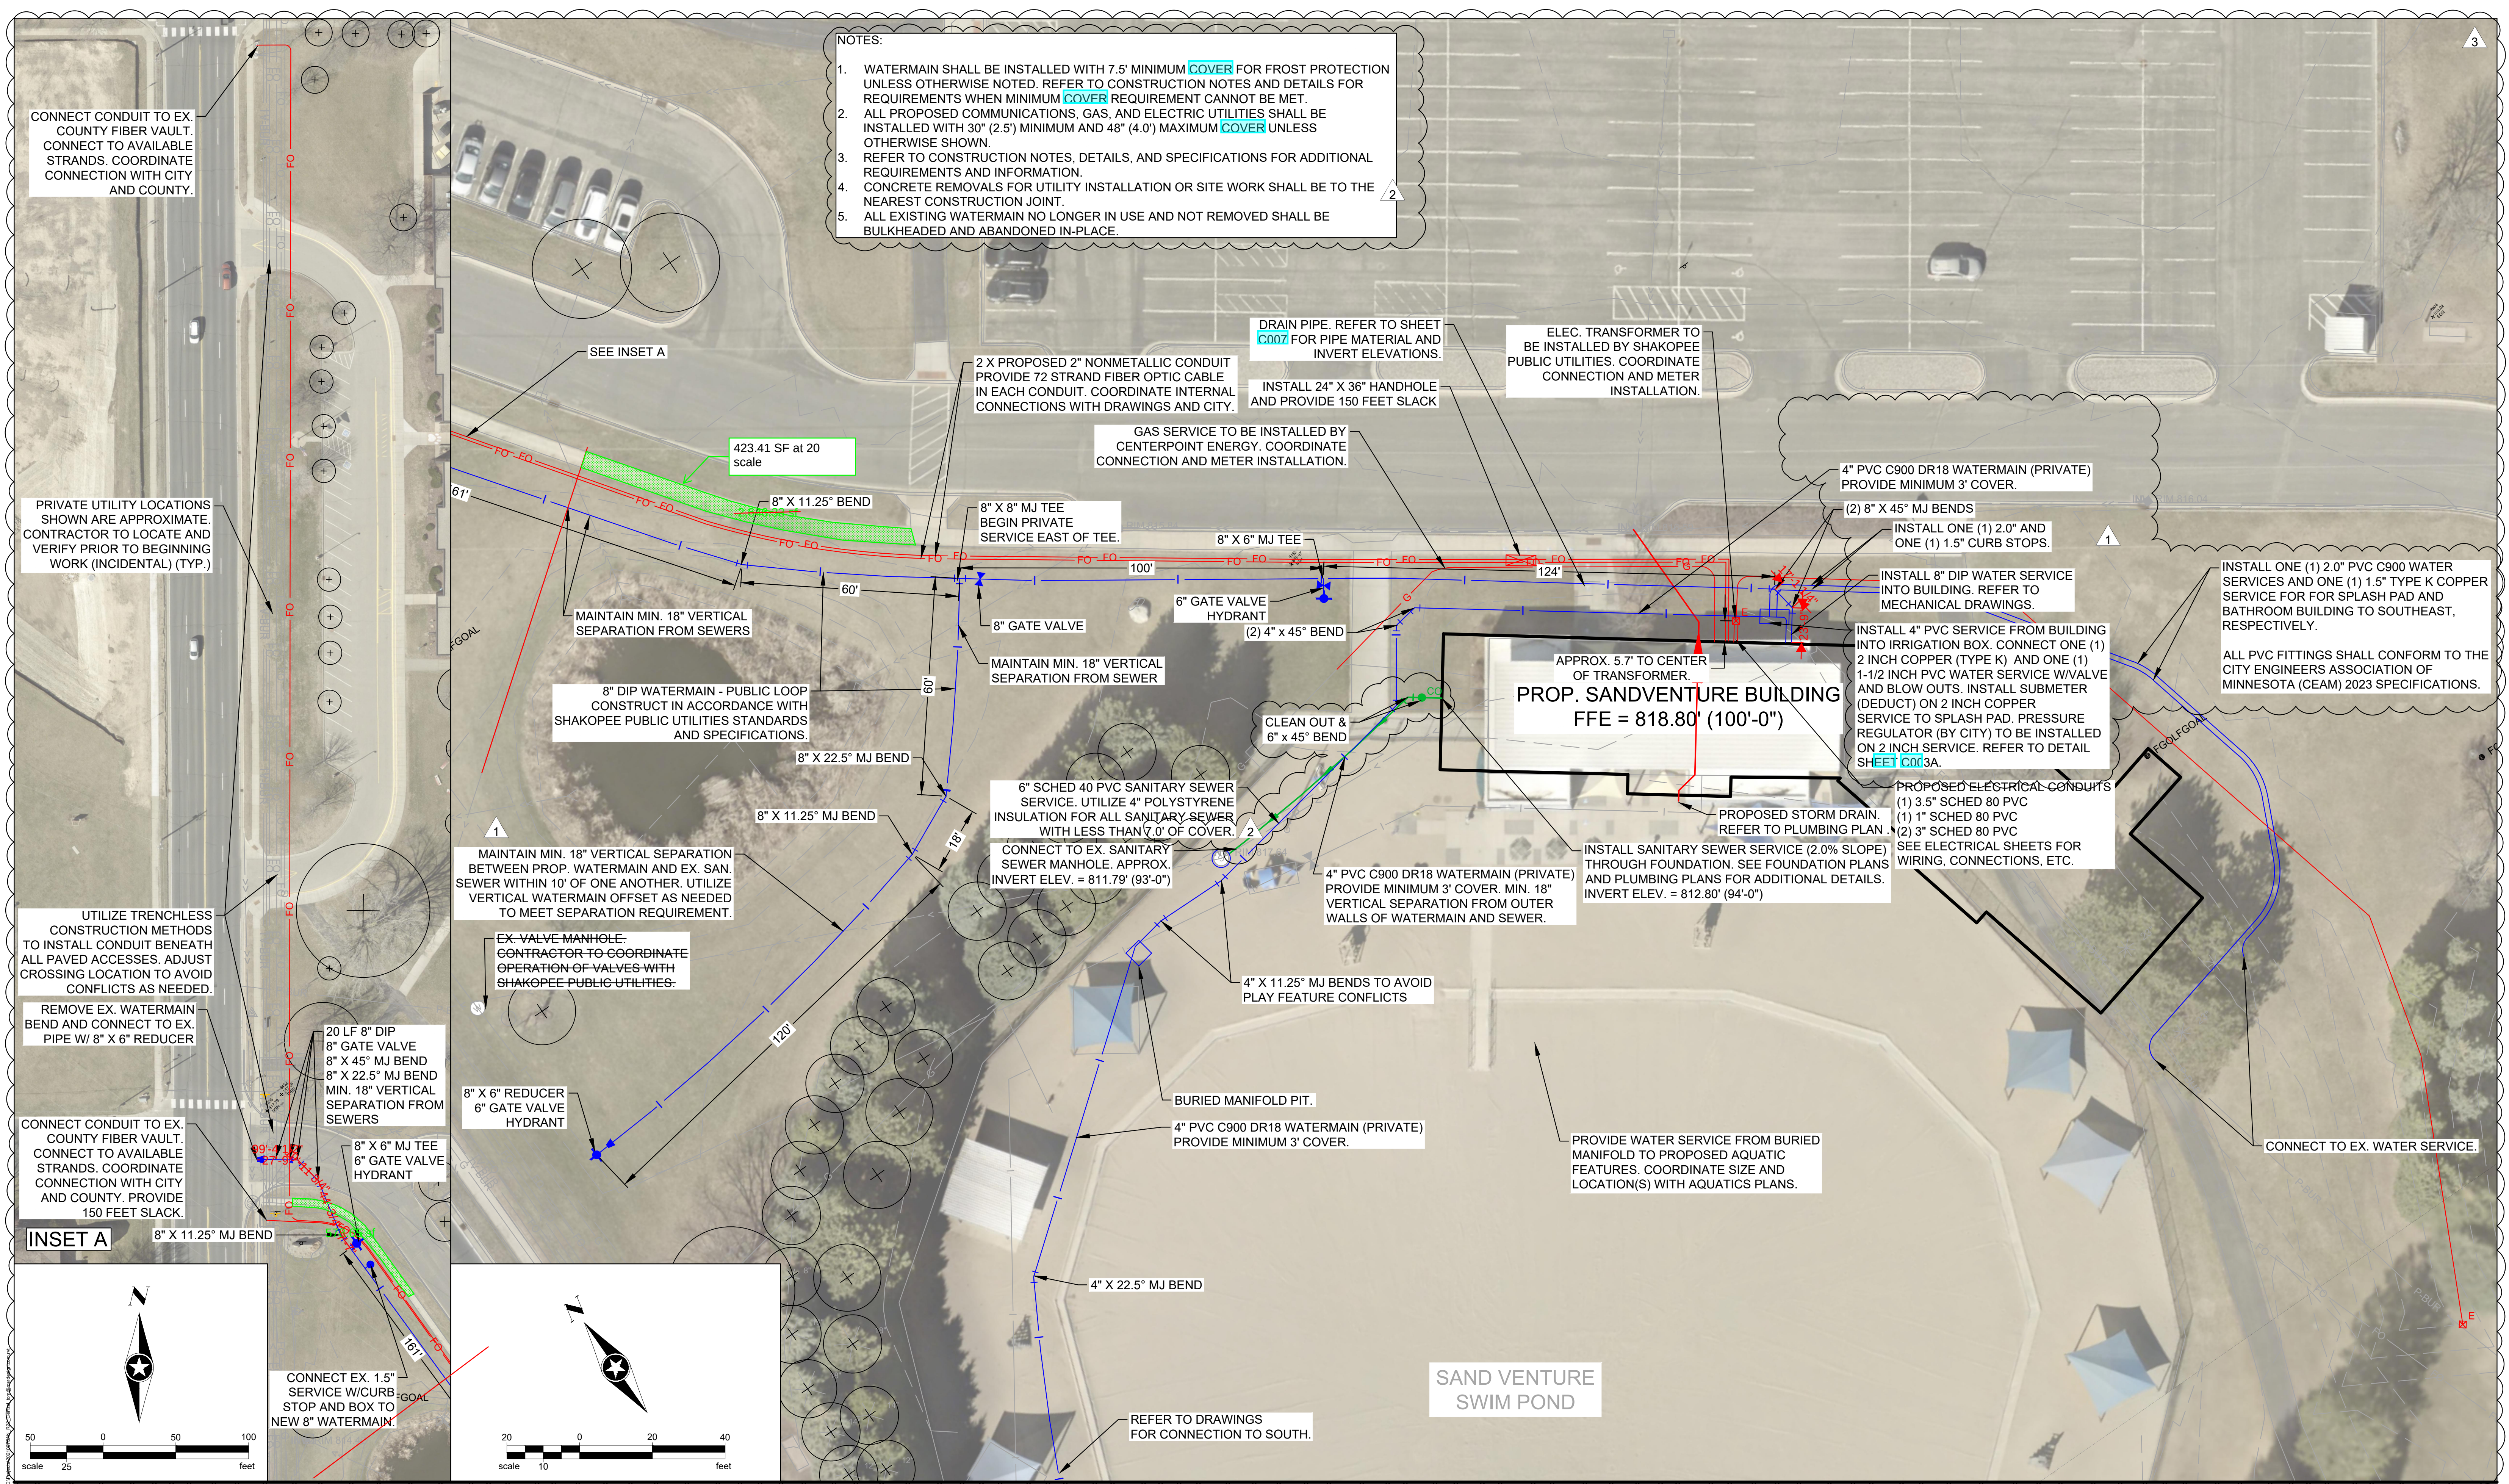

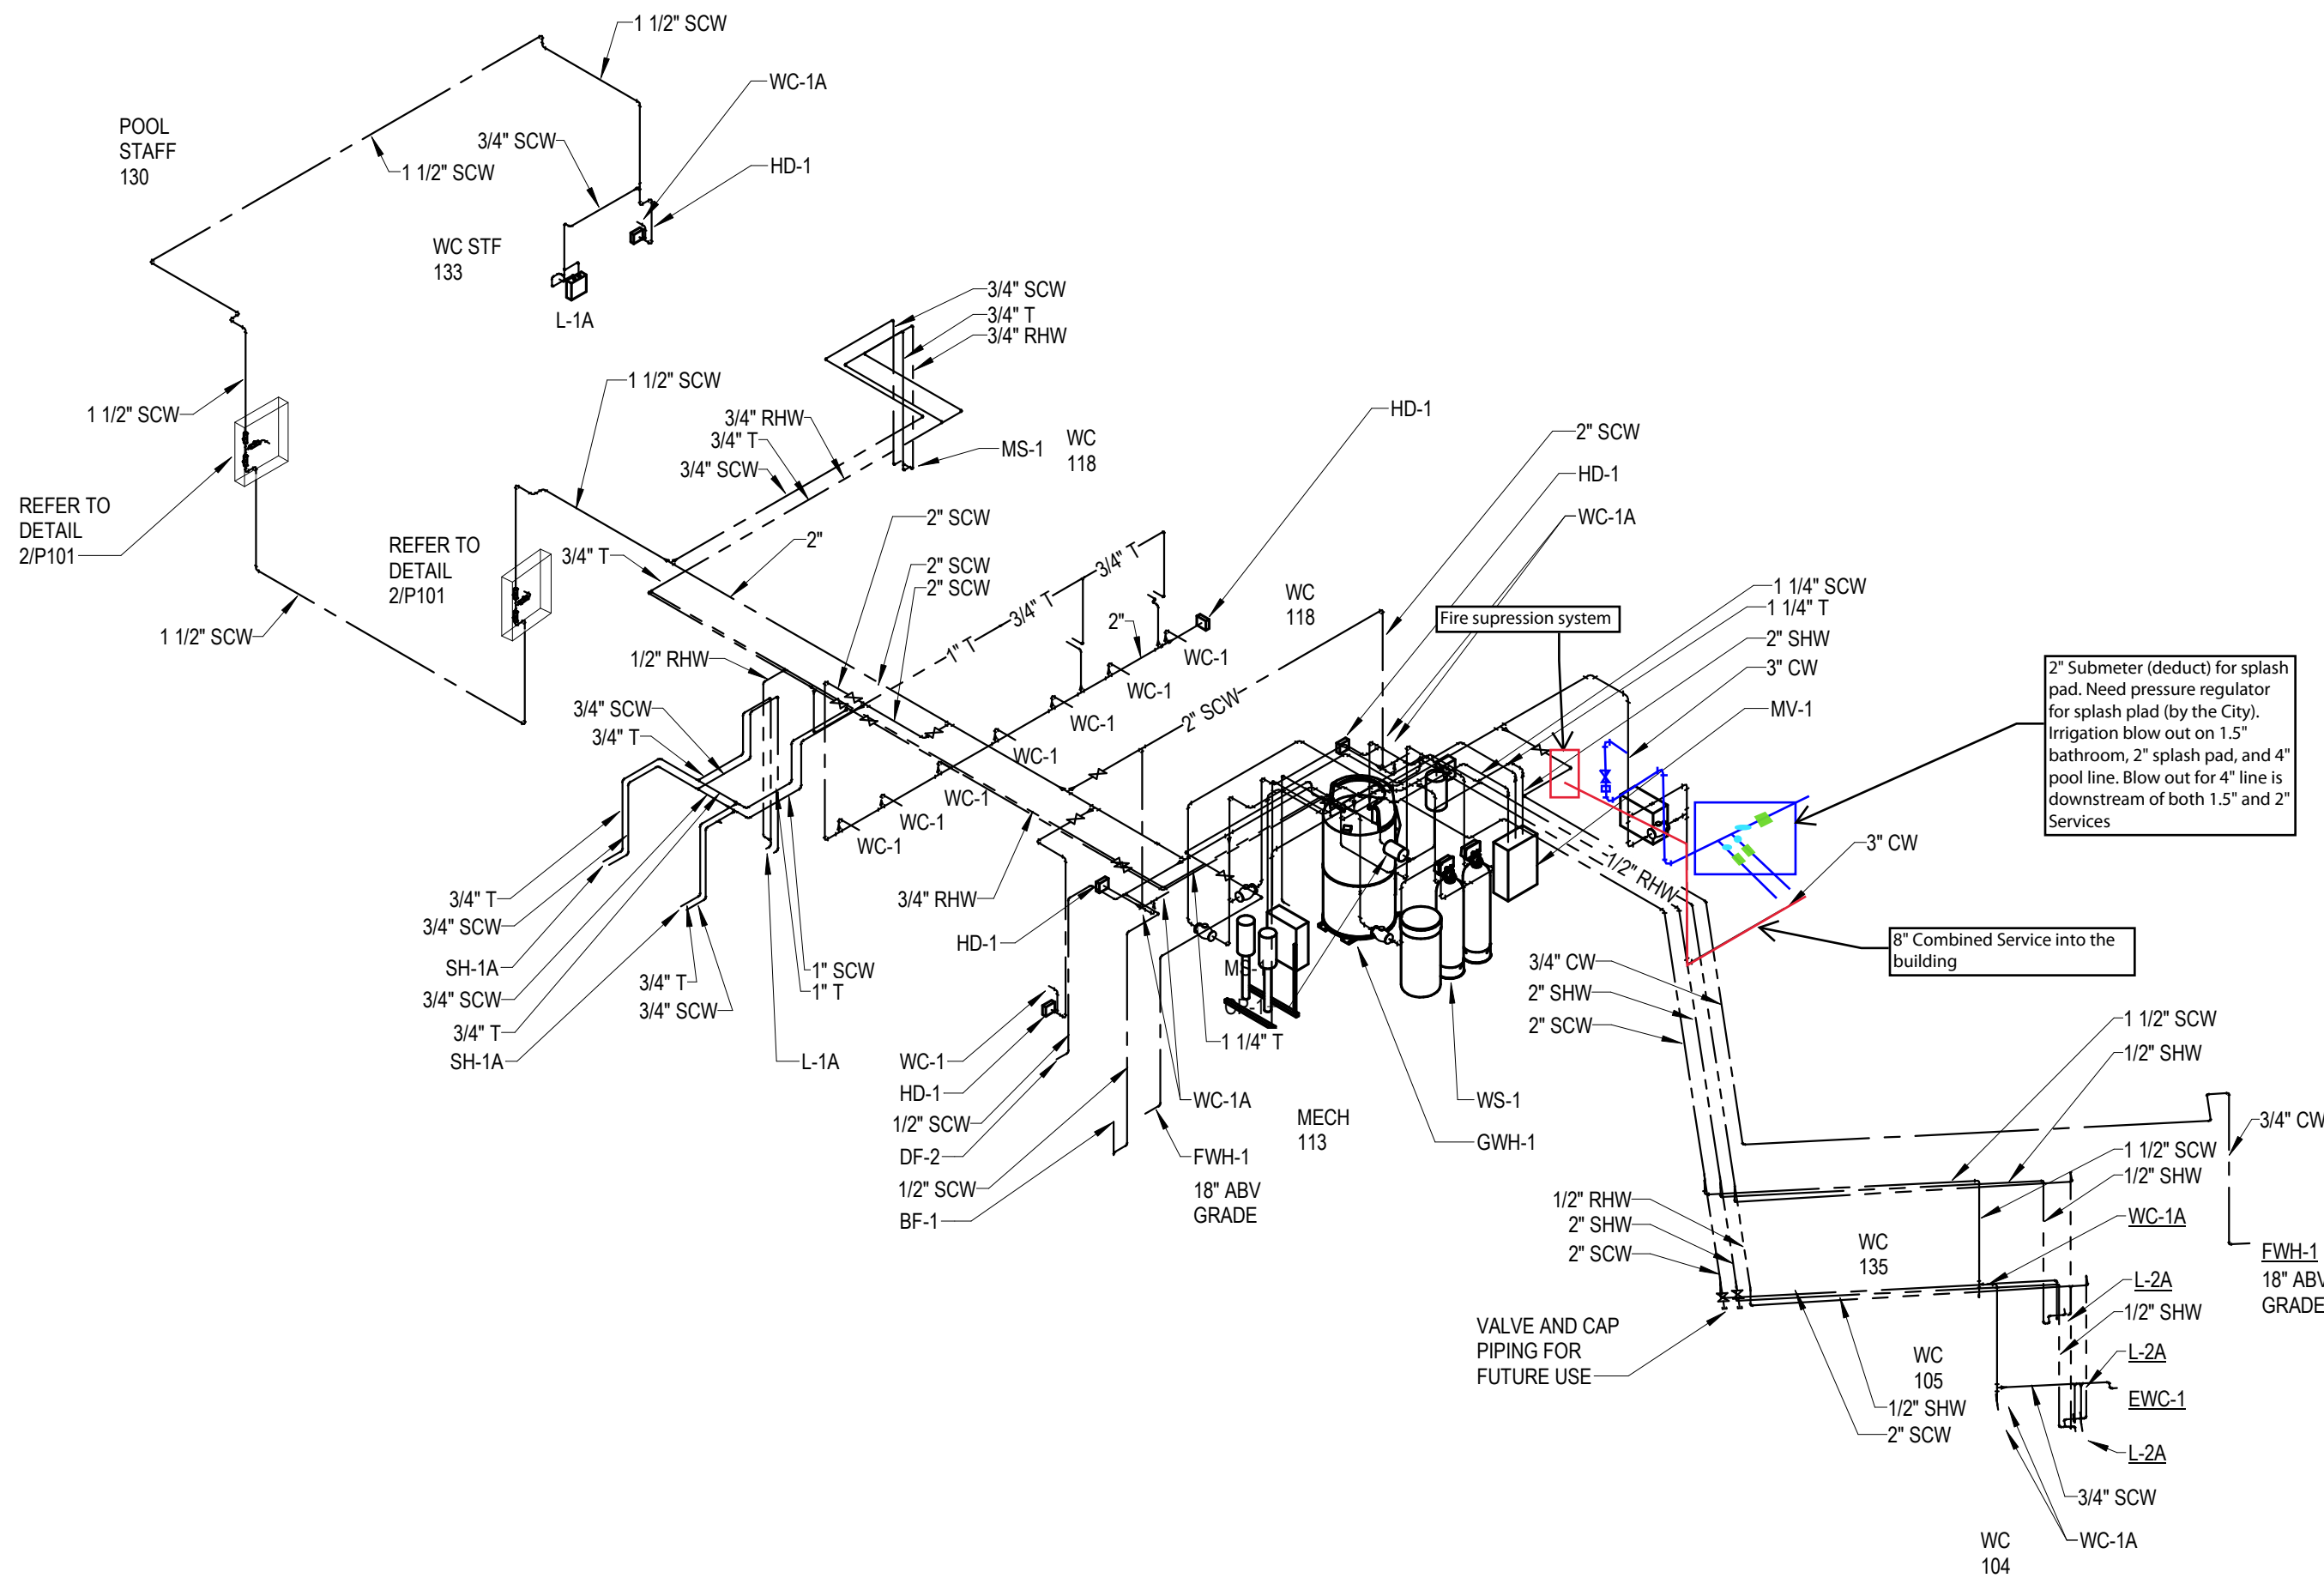

1 DOMESTIC WATER RISER  
NO SCALE

ARCHITECTURE & INTERIORS

MSRDesign

510 Marquette Avenue South, Suite 200  
Minneapolis, MN 55402 | 612.375.0336

LANDSCAPE ARCHITECTURE

CONFLUENCE

530 N THIRD STREET, SUITE 120  
MINNEAPOLIS, MN 55401 | 612.827.7825

STRUCTURAL ENGINEERING

MATTSON MACDONALD  
YOUNG

105 SOUTH 5TH AVENUE, SUITE 100  
MINNEAPOLIS, MN 55401 | 612.859.8299

MEP ENGINEERING

VICTUS ENGINEERING

2327 WYCLIFF STREET, SUITE 230  
SAINT PAUL, MN 55114 | 612.859.8299

CIVIL ENGINEERING

SEH ENGINEERING

10650 RED CIRCLE DR, SUITE 500  
MINNETONKA, MN 55343 | 952.912.2637

Project No: 230050

SANDVENTURE

1101 Adams St. S  
Shakopee, MN 55379

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Engineer under the Laws of the State of Minnesota.

Engineer Seal

Signature Brett Sullivan

Print Name Brett Sullivan

Date DECEMBER 21, 2023 License No 60095

ISSUE / REVISION

| Mark | Date       | Description                |
|------|------------|----------------------------|
| --   | 09.01.2023 | BID PACK #3                |
| 1    | 12.21.2023 | CONFORMED CONSTRUCTION SET |

CONFORMED CONSTRUCTION SET

DOMESTIC WATER RISER

P401



**KRAUS-ANDERSON®**  
*Construction Company*

**501 South Eighth Street  
Minneapolis, MN 55404**

## Supplementary Instructions

---

|          |                                                                                               |        |            |
|----------|-----------------------------------------------------------------------------------------------|--------|------------|
| Project: | 2410068-02<br>City of Shakopee - SandVenture<br>1101 Adams Street South<br>Shakopee, MN 55379 | PCO #: | 34         |
|          |                                                                                               | Date:  | 03/21/2024 |

To: Esteban Perez, Kraus-Anderson Construction Company  
Jeremy Nathe, Kraus-Anderson Construction Company  
Justin Rice, S.M. Hentges & Sons, Inc.  
Brad Aldrich, Confluence

---

Pursuant to General and Supplementary Conditions of the Contract, the following instructions are included in the work. All responses are required within seven (7) days.

---

### DESCRIPTION OF THE WORK:

Please provide us with a written cost estimate per the attached SEH ASI 07: Earthwork Changes.

Attachments: SEH ASI 07 Dated 3/20/24

---

☐ We have reviewed the PCO and acknowledge that it is a "no change" item and does not affect our completion date.

Signed By: \_\_\_\_\_ Date: \_\_\_\_\_

Company Name: \_\_\_\_\_



Building a Better World  
for All of Us®

OWNER: City of Shakopee

PROJECT: SandVenture

ASI DATE: March 20, 2024

The following changes and/or additions shall be made to the plans and/or specifications. All other requirements of the contract documents shall remain the same.

**Changes/Additions to the Bid Documents:**

THIS ASI is hereby made part of the contract documents on the subject work as though originally included therein. The following amendments, additions and/or corrections shall govern this work.

**Revisions to Drawings**

Sheet C003A

1. Removed storm basin typical section detail. No longer included in scope of work.
2. Added detail for EXTERIOR SERVICE CONNECTIONS AND BLOWOUT ASSEMBLY".

Sheet C006

1. Updated watermain size to 8" and modified watermain layout to meet fire flow and site purposes.
2. Added 4" service from building to serve pool pumphouse.
3. Removed storm basin grading and equalizing culverts. No longer included in scope of work.
4. Updated notes.

x:\ae\cl\conf\171756\7-const-svcs\71-mgmt\30-insp-note\asi 007.docx

Engineers | Architects | Planners | Scientists

**Short Elliott Hendrickson Inc.**, 10650 Red Circle Drive, Suite 500, Minnetonka, MN 55343-9229

952.912.2600 | 800.734.6757 | 888.908.8166 fax | **sehinc.com**

SEH is 100% employee-owned | Affirmative Action–Equal Opportunity Employer